

HT_{2.0}

445~465W

Hî- {Ê BGDF



N TOPCon



SMBB



LID

¼ID



B¢Ã LC¢E


IEC

IEC

IÃ¢

IÃ¢

IÃ¢

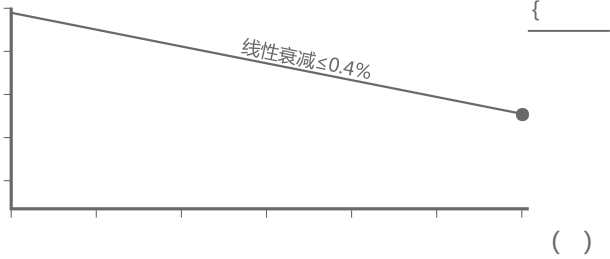

25

30

≤1%

≤0.4%



Munich RE



info@hysolar.com



https://www.hysolar.com

N HY-NT11/48BGDF

(½mĖĬ è)

(çmĬĬ ç)

(ImĬĬ A)

(çOI ç)

(IPĬ A)

(½mĖĬ è)

(çmĬĬ ç)

(ImĬĬ A)

(çOI ç)

(IPĬ A)

¼mĬĬ è

çmĬĬ ç

ImĬĬ A

çOI ç

IPĬ A

(½mĬĬ)

-

(IPĬ)

(çOI)

-

({ y çĖ)

C

(IEC)

çOI






3

1¼

A

-

C

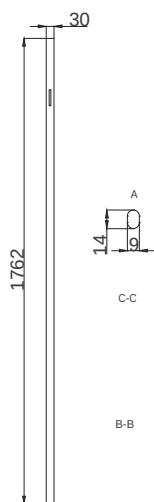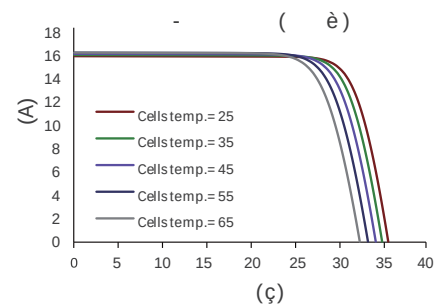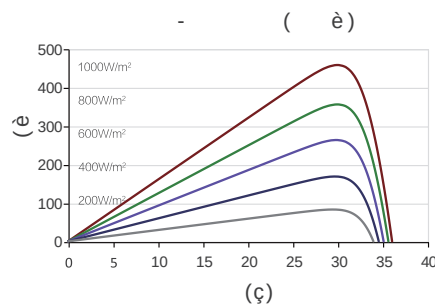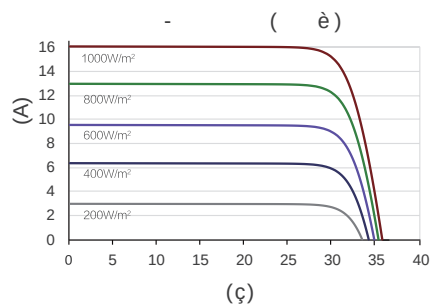

C-C

B-B

(Ĭ Ĭ)

Ĭ Ĭ mm

{

()

mm

() mm (-) mm

(IEC)

mm² A è G

¼Ė ()

¼Ė ()

(IEC)

¼ç-HĬç ĬŮ() yç Eçç A()

kg

kg

(m)